

# Champion Gasket

## Style 39 Oil

**COMPRESSED FIBRE GASKET FOR STEAM AND OIL APPLICATIONS**

Compressed fibre jointing sheet with special fillers and binders



**Champion Style 39 Oil** is manufactured from premium grade fibre and compounded with specialized elastomers under special curing process to withstand the most exacting demands of oil and steel applications.

**Champion Style 39 Oil** Jointing Sheets are developed for severely critical applications and this quality is applicable to a wide range of duties with severe working conditions of temperature and pressure.

**Applications:** **Champion Style 39 Oil** can be used as medium-performance jointing sheet for high temperature and pressure applications related to petrochemicals, distillates, refineries and process industry.

**Service Media:** Suitable for applications against dry, wet steam / water, gases, alkalis, oil at non critical temperature, non corrosive chemicals, fuels and general engineering.

#### How Supplied:

Sheets, pre-cut gaskets, special density, thickness, shape or grade available on request.

#### Sheet ordering information

Available Sheet Sizes in mm (+/- 5%)	1600 mm x 4000 mm
	1500 mm x 2000 mm
	1600 mm x 2000 mm
	2000 mm X 6000 mm
Thickness (mm)	0.5 mm; 0.75 mm; 1.0 mm; 1.5 mm; 2.0 mm; 3.0 mm; 4.0 mm**; 5.0 mm**

#### Typical Physical Properties:

Description	Standard Specs	Typical Values
Density	DIN 28090-2	1.9-2.2 g/cm <sup>2</sup>
Tensile Strength	IS 2712:1998	≥ 18 MPa / 180 Bar (2610 psi)
Compressibility	ASTM F 36	7% to 12%
Stress Relaxation	@40 MPa 16 hr/300°C-IS 6210	≥ 23 MPa / 230 Bar (3335 psi)
Gas Permeability	BS 7531	< 0.5 cc/min
Recovery	ASTM F 36	≥ 45%
Ignition Loss	DIN 52911	≤ 22%



## CHAMPION SEALS INDIA PRIVATE LIMITED SEALANT & GASKET INDIA PRIVATE LIMITED

Champion House, 15 Parsi Panchayat Road, Andheri (East), Mumbai – 400069. India  
 Product Inquiry : [info@championseals.in](mailto:info@championseals.in)  
 Customer Care Number: +91 98201 71162  
 Website : [www.championseals.in](http://www.championseals.in)



#### TEMPERATURE


**Maximum Continuous Service Temperature:**  
 440°C / 824°F - Non Metallic  
 480°C / 896°F - Metallic



#### PRESSURE

**Maximum Pressure:**  
 8 MPa / 80 Bar (1160 psi)  
 - Non Metallic  
 10 MPa / 100 Bar (1450 psi)  
 - Metallic

#### CHAMPION STYLE 39 OIL GENERAL PURPOSE PRESSURE / TEMPERATURE LIMITS

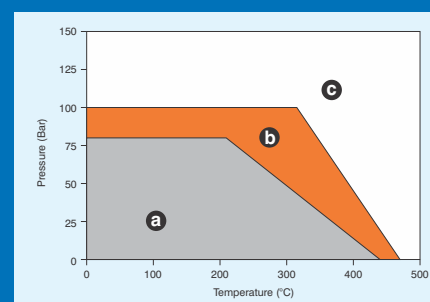

#### Guidelines for application:

- Suitable subject to chemical compatibility.
- Suitable for short term temperature fluctuation or non critical application.
- For extreme service conditions, kindly consult Champion Technical Support.

#### APPROVALS / COMPLIANCE

Compliance with  
 IS 2712 - 1998 Grade O/2 & W/2  
 IS 2712 - 1971 Grade B/S

\*Kindly consult Champion Technical Support for all critical applications.

\*\*Available only in 1600 X 4000 / 1600 X 2000 mm